


**PLAN VIEW**


0.0495 CUBIC YARDS PER LINEAL FOOT.  
20.2 LINEAL FEET PER CUBIC YARDS

**NOTES:**

1. 6" CURB SHALL ONLY BE USED ON LOCAL STREETS WHERE DRAINAGE PERMITS.
2. CURB AND GUTTER SHALL BE CONSTRUCTED MONOLITHICALLY OF CLASS "520-C-2500" CONCRETE. PER STANDARD SPECIFICATION FOR PUBLIC WORKS CONSTRUCTION, LATEST EDITION.
3. WIDTHS OF STANDARD STREET SECTIONS SHOWN ON PLANS ARE TO CURB LINE UNLESS OTHERWISE INDICATED.
4. WEAKENED PLANE JOINTS SHALL BE CONSTRUCTED AT 10-FOOT INTERVALS, EXCEPT THAT THE INTERVAL SHALL BE VARIED TO ALLOW MATCHING OF JOINTS IN ADJACENT EXISTING IMPROVEMENTS.
5. CURING COMPOUND SHALL BE SPRAYED UNIFORMLY ON EXPOSED SURFACES.
6. WHEN CURB AND GUTTER IS PLACED BY AN EXTRUSION MACHINE MINOR FINISHING MAY BE DONE TO PROVIDE AN ACCEPTABLE FINISH AND THE WEAKENED PLANE JOINTS MAY BE SAWCUT.

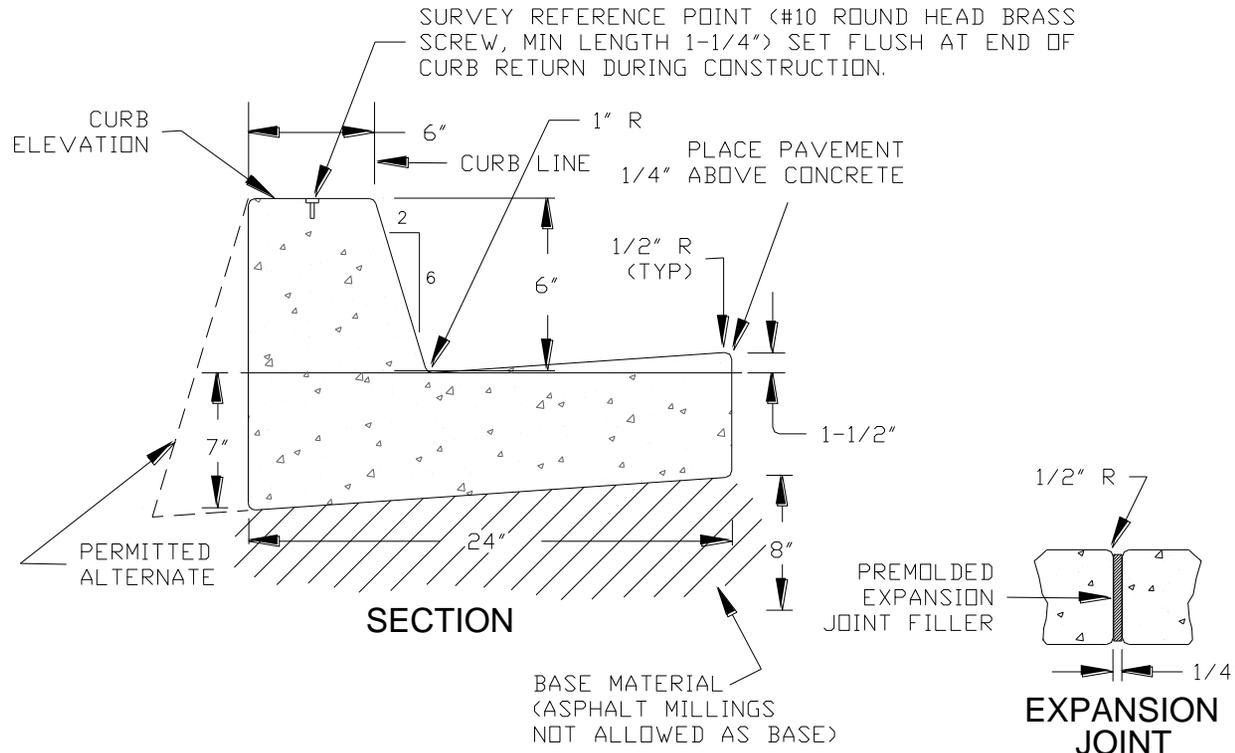

**SECTION**



**EXPANSION JOINT**

Detail No.		<p>City of Needles <b>STANDARD DETAIL</b></p>	<p><b>6" Curb &amp; Gutter Detail</b></p>	Revised	Detail No.
<b>CG-1</b>				01/23/2008	<b>CG-1</b>